

**PRV**PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen

EP 00 / 977

RECEIVED 21 MAR 2000

**Intyg  
Certificate**

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande                      BTG Eclepens SA, Eclepens CH  
Applicant (s)

(21) Patentansökningsnummer    9900564-7  
Patent application number

(86) Ingivningsdatum                      1999-02-18  
Date of filing

Stockholm, 2000-02-01

För Patent- och registreringsverket  
For the Patent- and Registration Office

*Emma Johnsson*  
Emma Johnsson

Avgift  
Fee                      170:-

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

**PATENT- OCH  
REGISTRERINGSVERKET  
SWEDEN**

Postadress/Adress  
Box 5055  
S-102 42 STOCKHOLM

Telefon/Phone  
+46 8 782 25 00  
Vx 08-782 25 00

Telex  
17978  
PATOREG S

Telefax  
+46 8 666 02 86  
08-666 02 86



**AWAPATENT**

Kontor/Handläggare  
Stockholm/Tore Burman/LFG

BTG ECLEPENS S.A.  
Ansökningsnr Referens  
SE-2998012

1

A PROCESS FOR THE MANUFACTURE OF SOFT TIPPED BLADES.

Technical field

The present invention relates to processes for the manufacture of coating or doctoring blades comprising a band of steel or other form-stable material and a wear-resistant coating applied onto said band along a longitudinal edge section thereof subject to wear.

Background of the invention

Coating or doctoring blades tipped with rubbery or soft material are presently prepared only by moulding in a closed mould in which a band of steel or other form-stable material is placed and constitutes substrate for the coating. A liquid mix of components is injected at the lower end of a preheated mould until it appears at the opposite upper end. Care has to be taken to prevent introduction of air bubbles in the liquid material and no leakage from the mould must occur. A demoulding agent, generally based on silicones, is applied on the mould surfaces to prevent sticking of the cured material. Once filled, the mould is introduced into a circulated air oven at 80-110°C until curing has taken place so that the blades can be demoulded. This takes generally 45 to 180 minutes. After demoulding the blades are post-cured at 80-110°C for 12-24 hours.

This batch process is associated with several disadvantages, among which the main drawbacks are:

- the process encounters low productivity;
- each new blade geometry and blade length requires a new mould;
- the mould manufacturing costs are high, especially for large moulds with complex profiles;
- the larger the mould, the larger the oven necessary to preheat the mould and to cure the rubbery or soft ma-

- there are limitations in blade length because of difficulties in filling the mould without defects occurring, the need for longer pot-lives and lower viscosities, increasing mould weight, time to open, close and clean the mould etc.

### Brief summary of the invention

Another object of the invention is to provide such a process which will impart no limitations to blade length and geometry of the coated blade.

For these and other objects which will be clear from the following disclosure the invention provides a continuous process for the manufacture of coating or doctoring blades comprising a band of steel or other form-stable material and a wear-resistant polymer coating applied on said band along a longitudinal edge section thereof subjected to wear. The process involves the following steps:

- <sup>a</sup>0.0001; <sup>b</sup>0.0001; <sup>c</sup>0.0001; <sup>d</sup>0.0001; <sup>e</sup>0.0001; <sup>f</sup>0.0001; <sup>g</sup>0.0001; <sup>h</sup>0.0001; <sup>i</sup>0.0001; <sup>j</sup>0.0001.

- 5

3

- 10

25

12

30

35

ferred to use as a polymer a polyurethane.

A suitable fast-curing polymer composition is a 3-component liquid polyurethane composition containing a prepolymer, a polyol and a chain extender. Such composition is continuously mixed with a catalyst solution, whereafter the mixture is applied onto the band to be coated.

The coating width is preferably from about 5 to about 40 mm and a preferred thickness is from about 1 to about 3 mm.

After curing of the coating it is preferred to subject the coating to a grinding operation to obtain the desired profile or geometry.

#### 15 Brief summary of the drawing

The present invention will in the following be described with reference to the appended drawing, wherein:

Figure 1 is a diagrammatic view of a continuously moving band also illustrating the coating to be applied;

20 Figure 2 is a corresponding view of the alternative procedure of simultaneous manufacture of two soft-tipped blades; and

Figure 3 is a diagrammatic side view of an assembly for performing the continuous process according to the invention.

#### Detailed description of the invention

A preferred sequence of process steps is described in the following in general terms, but it should be observed that the present invention is not restricted to such steps other than as defined in the accompanying claims.

35 Step 1. This step involves surface preparation of a cold rolled metallic substrate having a thickness of 0.1 to 1.5 mm, a width of 50 to 200 mm and a length of up to 100 m. The surface area of the blade intended to receive the soft material deposit (edge or centre) is roughened

... ..

5

10

15

20

25

3.

3

[illegible]

chine assembly for performing the continuous process in accordance with the invention. A steel band 1 is supplied from a storage reel 19 and travels through a hot air tunnel for pre-heating and drying purposes. A mixing chamber 23 provided with an application nozzle 25 is placed above the travelling band 1 and applies a coating composition along the edge of band 1 as illustrated in Figure 1. The coated band 1 further travels through a hot air tunnel for curing purposes and band 1 with the applied elastic and tacky-free coating is then wound up on a take-up reel 29 using a spacer to avoid surface damage and also to compensate for the coating thickness. The coated blade is then ground to the desired shape and geometry and the band is cut in desired lengths to meet the consumers' need.

#### Description of specific embodiments

The following examples further illustrate the invention by specific embodiments thereof. It should be noted, however, that the invention is not restricted to these examples.

#### Example I

##### a) Bonding agent

A reel of cold rolled steel having a thickness of 0.635 mm, a width of 100 mm and a length of 30 m, is sand blasted on one side in an area forming a 3 cm wide longitudinal strip from one edge, using *Edelkorund weiss (WSK) F 180* (Treibacher). The roughened surface area is coated in a continuous way with a bonding agent such as *Chemosil 597 E* (Henkel) used to promote adhesion of cast polyurethanes to steel. The bonding agent solution is applied without dilution by means of a 0.15 mm thick and 4 cm wide bent steel blade so as to cover the entire sand blasted area with a regular and smooth film of approximately 15  $\mu$ m dry thickness. After evaporation of the solvent, the reel of coated steel is optionally cured in a



22

b) PUR top coat

The liquid cast polyurethane composition used to coat the blade is applied on top of the bonding agent coated strip by means of a low pressure mixing and dosing machine equipped with a device allowing to inject a catalyst directly into the mixing chamber. The 3 component PUR is formulated to an ultra fast-curing composition by injecting a highly efficient catalyst solution directly into the mixing chamber. The composition is made up of an MDI (Polyester "quasi" prepolymer having an isocyanate content of 16.4% such as *Ureflex*<sup>®</sup> MDQ 23165 (Baulé), a Polyester Polyol *Ureflex*<sup>®</sup> D20 (Baulé) and a chain extender 1,4-Butanediol (Baulé), mixed in a ratio of 100:140:10.4 respectively. The catalyst solution *Ureflex*<sup>®</sup> SD6 (Baulé) is introduced directly into the mixing chamber at a rate of 2% of the total output of 0.25 kg/min, providing a pot-life of approximately 15 sec and a gel time of approximately 30 sec. The liquid mix is applied at 1 cm of the edge within the 3 cm wide bonding agent strip on the substrate moving at a linear speed of 3.3 m/min. The moving substrate is wound up 4 m away from the pouring point, leaving enough time for the polyurethane to gelify and become tack-free, while using a spacer so as to prevent any surface damage of the applied Polyurethane elastomer during the winding up operation. The reel of wound up substrate and spacer is then submitted to a heat treatment in a circulated air oven at 85°C for 24 h. After cooling down, the reel is unwound and shows no deformation of the metal substrate. The fully cured polyurethane elastomer strip has a shore A hardness of 70-73 (measured on the blade), a width of 3 cm and a thickness of 2.5 mm, obtained in one pass. Finally, the blades are ground in a continuous way to the final blade geometry and cut to the desired length.

Example II

Example I is repeated using a steel band with a width of 200 mm, the area to be coated being centrally positioned and having a width of 6 cm. This area is  
5 treated and coated as described in Example I and the band is then laser cut along the middle of the coated area, and tip grinding is performed to the desired blade geometry.

The invention has been described above by specific  
10 examples and sequence of steps involved in the continuous process according to the invention. However, it is clear to the skilled artisan that the process can be modified in different ways without departing from the inventive concept according to the appended claims. All such modi-  
15 fications are intended to be covered by said claims.

CLAIMS

1. A process for the manufacture of a coating or doctoring blade comprising a band of steel or other form-stable material and a wear-resistant polymer coating applied on said band along a longitudinal edge section thereof subjected to wear, characterized by the following steps:

- a) providing continuous relative movement between said band and an application and treatment station;
- 10 b) continuously applying at said station a fast-curing polymer composition along said edge section;
- c) allowing the applied composition to spread out so as to reach the very extreme of said edge section and then to cure to form an elastic and tacky-free coating;
- 15 and, optionally
- d) post-curing the coating at an increased temperature.

2. A process for the manufacture of a coating or doctoring blade comprising a first band of steel or other form-stable material and a wear-resistant polymer coating applied on said band along a longitudinal edge section thereof subjected to wear, characterized by the following steps:

- 25 a) providing continuous relative movement between a second band of double width compared to said first band and an application and treatment station;
- b) continuously supplying at said station a fast-curing composition along a longitudinal central section of double width compared to said edge section;
- 30 c) allowing the applied composition to spread out to the desired width and then to cure to form an elastic and tacky-free coating and, optionally, post-curing the coating at an increased temperature; and
- 35 d) longitudinally cutting said second band along the middle of the coated central section thereof to form two tip-coated blades

100

5

10

15

20

25

30

11. A coating or doctoring blade prepared by the process according to any one of the preceding claims.

ABSTRACT

A process for the manufacture of a coating or doctoring blade comprising a band of steel or other form-stable material and a wear-resistant polymer coating applied on said band along a longitudinal edge section thereof subjected to wear, said process comprising the following steps:

- 10       a) providing continuous relative movement between said band and an application and treatment station;
- b) continuously applying at said station a fast-curing polymer composition along said edge section;
- c) allowing the applied composition to spread out so  
15       as to reach the very extreme of said edge section and then to cure to form an elastic and tacky-free coating; and, optionally
- d) post-curing the coating at an increased temperature;
- 20       as an alternative to such process there can be used a blade of double width compared to said first band and continuously supplying a fast-curing composition along a longitudinal central section of double width compared to said edge section and longitudinally cutting said second  
25       band along the middle of the coated central section thereof to form two tip-coated blades; and
- a coating or doctoring blade prepared by such process.




Fig.1

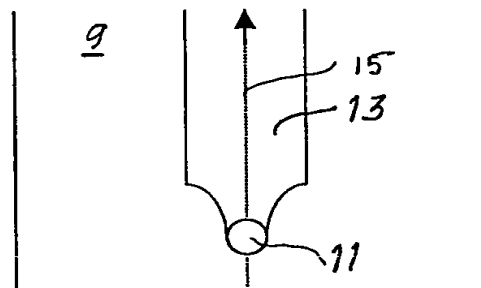


Fig.2

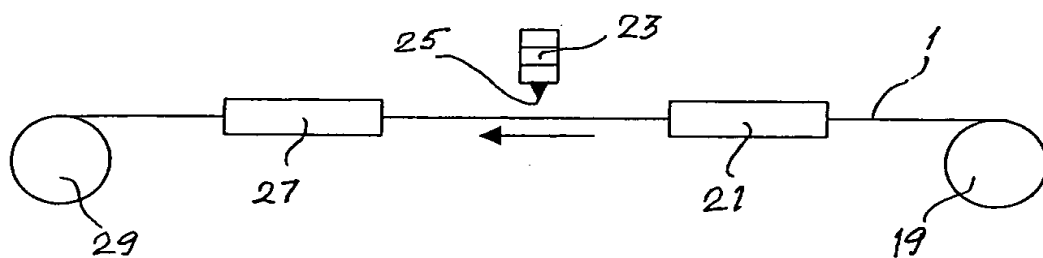


Fig.3